

IlSCO® ClearTap® Multi-Tap Connectors


[ORDER ONLINE](#)

Features

- ClearTap® is fully insulated yet allows visual inspection
- Transparent, flexible insulating cover
- Captive pressure screws
- Self-closing openings means no lost or loose caps and plugs
- Access from both sides of connector
- UL 486A/B Listed and CSA Certified for 600 Volts
- Cold temperature rated to -45° C
- Dual Rated for Copper and Aluminum Conductors
- Incoming and outgoing conductors must be staggered
- UL File E6207



-45°C

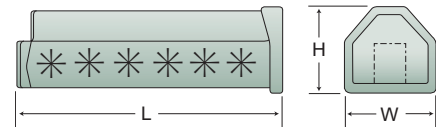

Multi-Tap Connectors

Part Number	Connector Shape	Number of Ports	Wire Range	Length (L)	Width (W)	Height (H)	Hex Size
PCT-2-2/0		2	2/0 - 14	2.61	2.30	1.97	3/16
PCT-4-2/0		4	2/0 - 14	4.30	2.30	1.97	3/16
PCT-6-2/0		6	2/0 - 14	5.98	2.30	1.97	3/16
PCT-2-4/0		2	4/0 - 4	2.75	2.49	2.25	5/16
PCT-4-4/0		4	4/0 - 6	4.61	2.49	2.25	5/16
PCT-6-4/0		6	4/0 - 4	6.47	2.49	2.25	5/16
PCT-2-350		2	350 MCM - 6	3.31	2.69	2.65	5/16
PCT-4-350		4	350 MCM - 6	5.62	2.69	2.65	5/16
PCT-8-350		8	350 MCM - 6	10.24	2.69	2.65	5/16
PCT-2-600		2	600 MCM - 6	3.90	3.43	3.27	1/2
PCT-4-600		4	600 MCM - 6	6.64	3.43	3.27	1/2
PCT-4-800		4	800 MCM - 250 MCM	7.40	3.43	3.27	1/2